




EdiFERELUX 1.2

ACCIAIO AL CARBONIO SMALTATO
ENAMELLED CARBON STEEL

EdiFERELUX 1.2

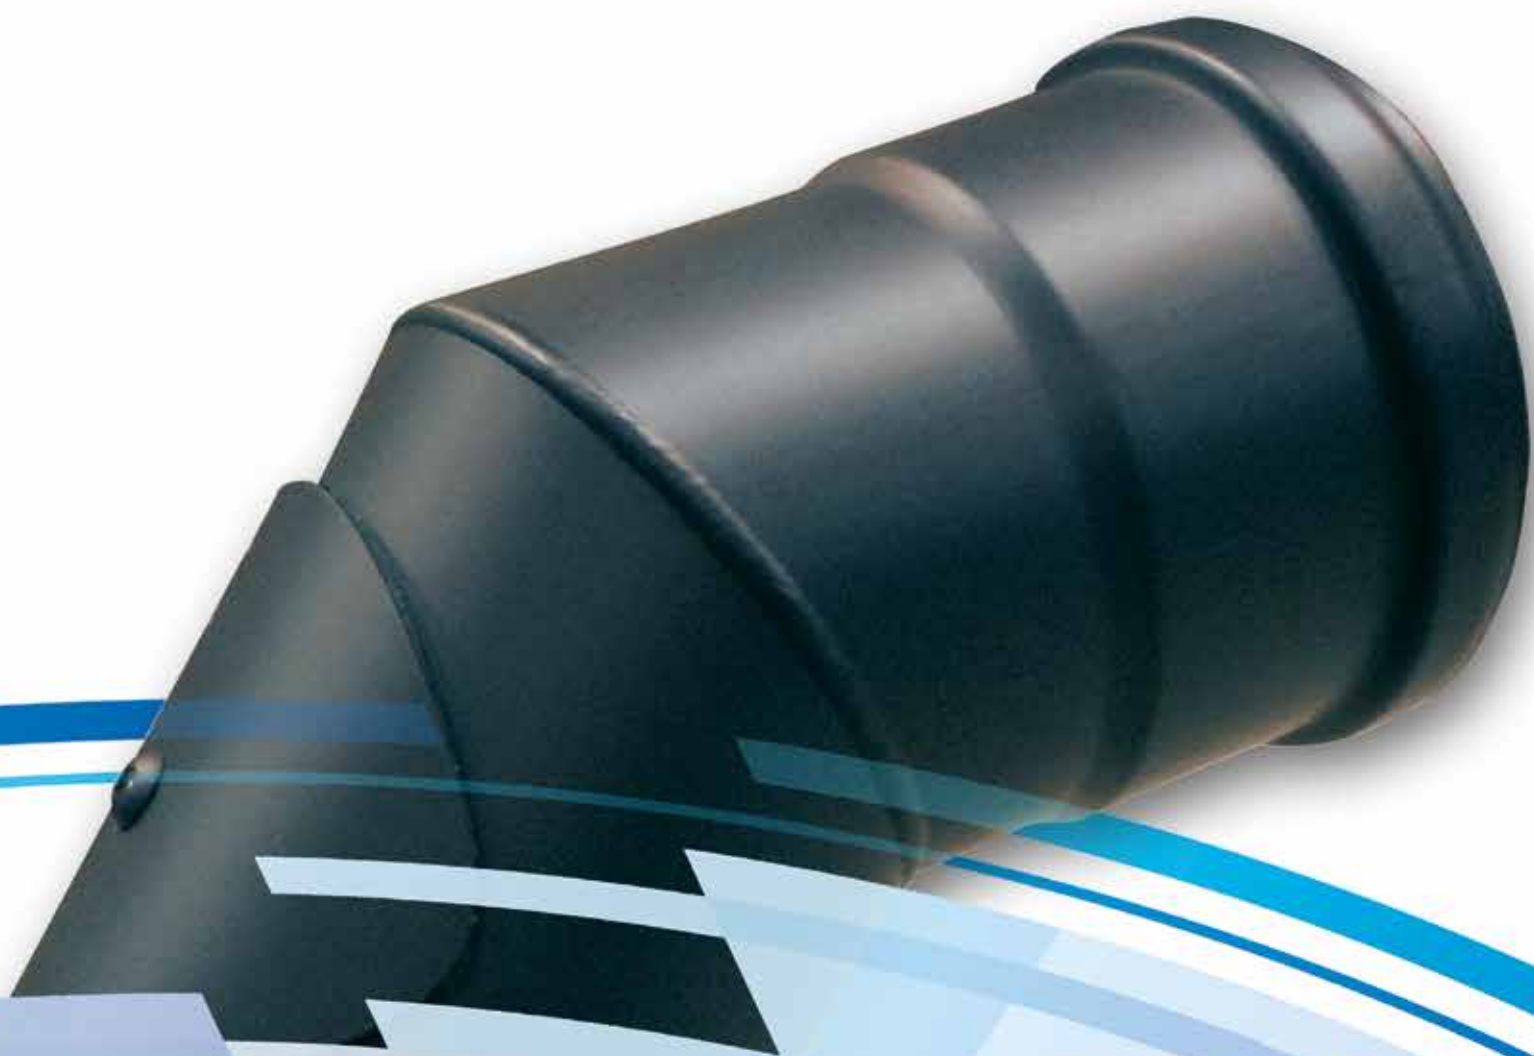

SISTEMA MONOPARETE EdiFERELUX 1.2

Il sistema **monoparete EdiFERELUX 1.2** è composto da elementi componibili rigidi, realizzati in acciaio al carbonio smaltato nero di spessore 1,2 mm, conformi agli standard previsti dalla marcatura CE secondo la normativa EN 1856-2. Gli elementi modulari hanno innesto classico a bicchiere maschio-femmina calibrato con guarnizione di tenuta a triplice labbro, da utilizzarsi solo con temperature non superiori a 250 °C e pressioni positive fino a 200 Pa, conforme alla normativa europea EN 14241-1, e giunzione meccanica con semplice innesto.

Riferimento normativo e designazione

Marcatura prodotto secondo normativa europea CE 0476 EN 1856-2.

T200 P1 W V2 L80120 O30 M

T600 N1 W V2 L80120 G375 NM (Ø 80 - 100)

Utilizzo

Condotti, canali da fumo, camini metallici, esalazioni aria asserviti a generatori di calore di tipo stufe a pellet, biocombustili e similari.

Applicazione

Installazione interna.

Diametri disponibili - mm

80 - 100.

Guarnizione in silicone compresa e montata.

SINGLE WALL EdiFERELUX 1.2 SYSTEM

***Single wall EdiFERELUX 1.2** system is composed by modular rigid elements, made of enamelled carbon steel thickness of 1.2 mm, according to the standards set out by the European CE mark, EN 1856-2. The modular elements have classic male-female junction calibrated, with triple seal lip gasket, for exclusive use with temperatures up to 250 °C and positive pressure up to 200 Pa, conforming to European standard EN 14241-1, and simple mechanical connection between the elements.*

Normative references and designations

Product marking according to the European standard CE EN 1856-2.

T200 P1 W V2 L80120 O30 M

T600 N1 W V2 L80120 G375 NM (Ø 80 - 100)

Utilizations

Ducts, flue pipes, metal chimneys, air conduction subservient to pellet stoves, biofuels and similar.

Application

Internal installation.

Available diameters - mm

80 - 100.

All the items are complete of silicone seal.


MONOPARETE SMALTATO - ENAMELLED SINGLE WALL

EIKSMA12TA1S...



Elemento lineare da 1 m.

Pipe 1 m.

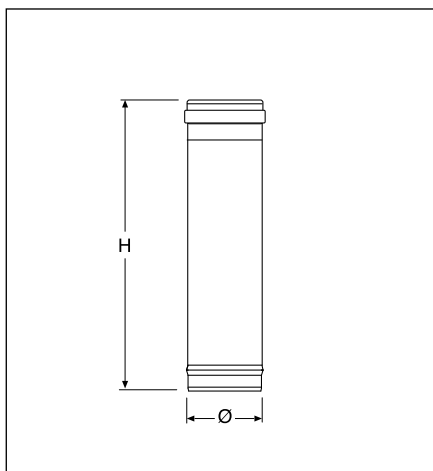


Ø	COD.	H
80	EIKSMA12TA1S08	1000
100	EIKSMA12TA1S10	1000

EIKSMA12TA5S...



Elemento lineare da 0,50 m.

Pipe 0.50 m.

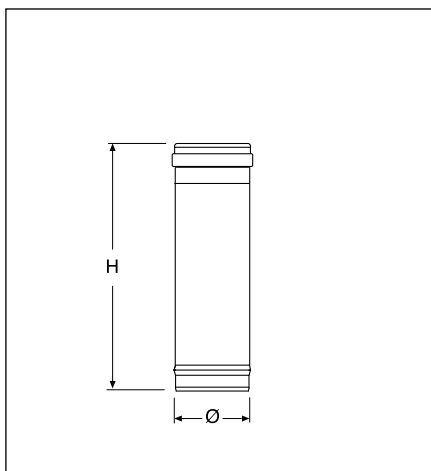


Ø	COD.	H
80	EIKSMA12TA5S08	500
100	EIKSMA12TA5S10	500

EIKSMA12TA25S...



Elemento lineare da 0,25 m.

Pipe 0.25 m.

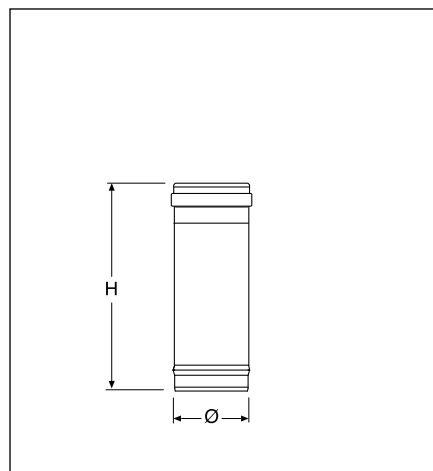


Ø	COD.	H
80	EIKSMA12TA25S08	250
100	EIKSMA12TA25S10	250

ESMA12TAEPS4S...



Elemento singolo telescopico.

Adjustable pipe.

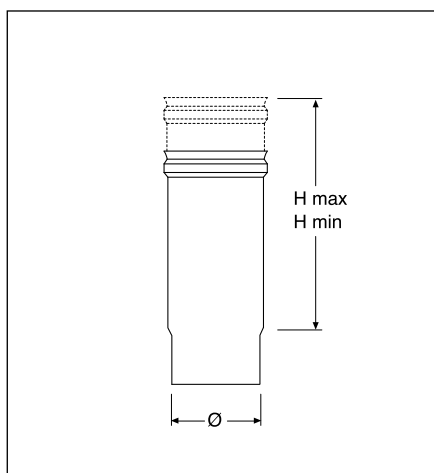


Ø	COD.	H min	H max
80	ESMA12TAEPS4S08	250	400
100	ESMA12TAEPS4S10	250	400

ESMA12EPSCF4S... *



Elemento telescopico completo di fascetta reggitubo.

Adjustable pipe with band.

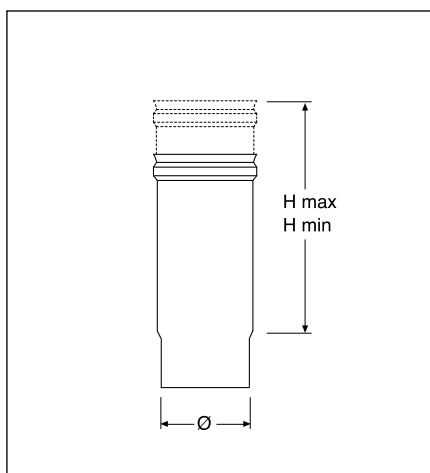


Ø	COD.	H min	H max
80	ESMA12EPSCF4S08	250	400
100	ESMA12EPSCF4S10	250	400

EIKSMA12G90...



Curva a 90°.

Elbow 90°.

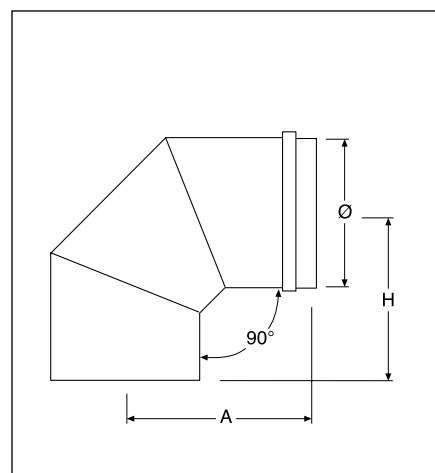

Ø	COD.	A	H
80	EIKSMA12G9008	154	159
100	EIKSMA12G9010	163	168


MONOPARETE SMALTATO - ENAMELLED SINGLE WALL

EIKSMA12GA90I...



Curva a 90° con ispezione.

Elbow 90° with inspection door.

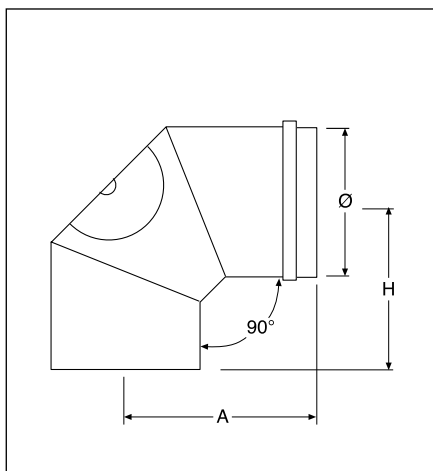


Ø	COD.	A	H
80	EIKSMA12GA90I08	154	159
100	EIKSMA12GA90I10	163	168

EIKSMA12G45...



Curva a 45°.

Elbow 45°.

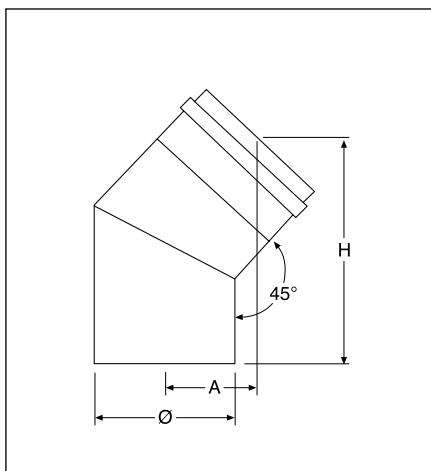


Ø	COD.	A	H
80	EIKSMA12G4508	65	162
100	EIKSMA12G4510	68	169

SMA12T90TCFFM..



Raccordo a "T" 90° FFM con tappo cieco.

Tee 90° FFM with tee cap.

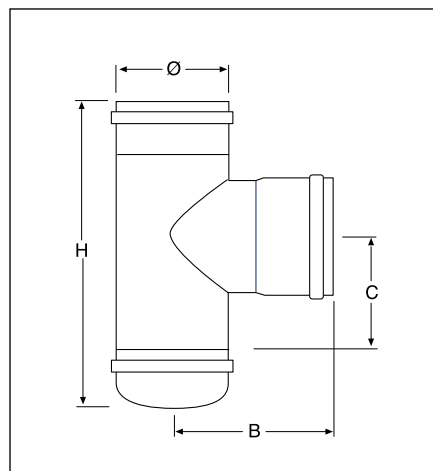

Ø	COD.	B	C	H
80	SMA12T90TCFFM08	115	100	220
100	SMA12T90TCFFM10	125	110	225


Finitura bianca e grigia a richiesta
On request white and grey finish

SMA12T90TCMFM..



Raccordo a "T" 90° MFM con tappo cieco.

Tee 90° MFM with tee cap.

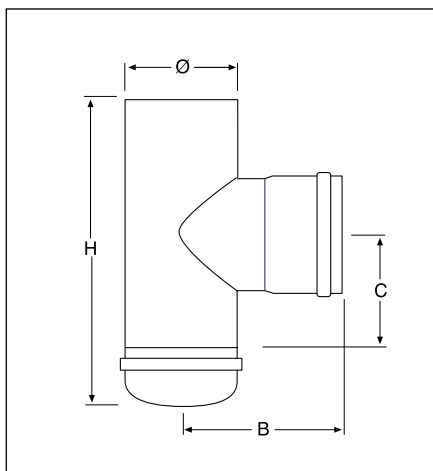


Ø	COD.	B	C	H
80	SMA12T90TCMFM08	115	110	220
100	SMA12T90TCMFM10	125	110	225

SMA12T9UTCFFM..



Raccordo a "T" 90° uscita ridotta Ø 80 mm femmina con tappo cieco

Tee 90° reduced Ø 80 mm female with tee cap.

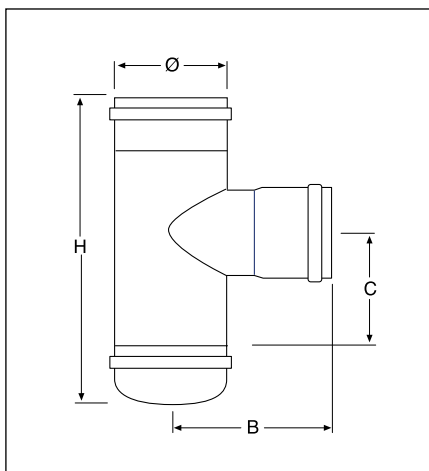


Ø	COD.	B	C	H
80	SMA12T9UTCFFM08	#	#	#
100	SMA12T9UTCFFM10	128	110	220

EIKSMA12FFA...



Manicotto femmina - femmina.

Double female adaptor.

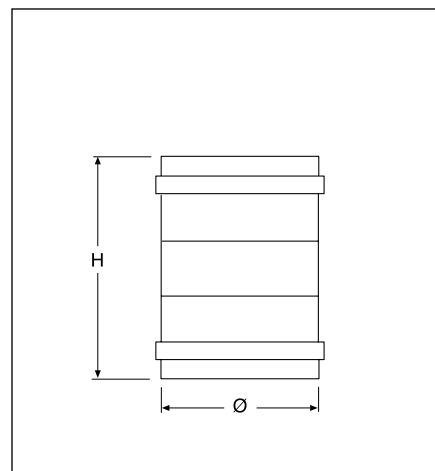

Ø	COD.	H
80	EIKSMA12FFA08	140
100	EIKSMA12FFA10	140


MONOPARETE SMALTATO - ENAMELLED SINGLE WALL

EIKSMA12MMA...



Manicotto maschio - maschio.

Double male adaptor.

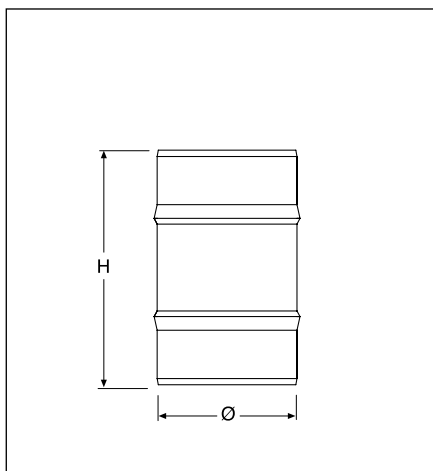


Ø	COD.	H
80	EIKSMA12MMA08	150
100	EIKSMA12MMA10	150

EIKSMGRAD...



Rosone copriforo con bombatura.

Ceiling hole cover with camber.

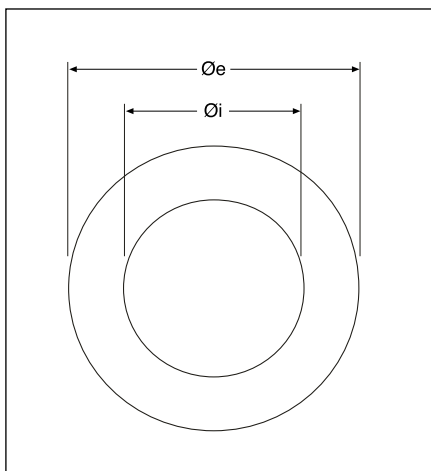


Øi	Øe	COD.
80	150	EIKSMGRAD080
100	180	EIKSMGRAD100

EIKSMROSCO3F...



Rosone copriforo liscio con tre fori.

Ceiling hole cover smooth with three holes.

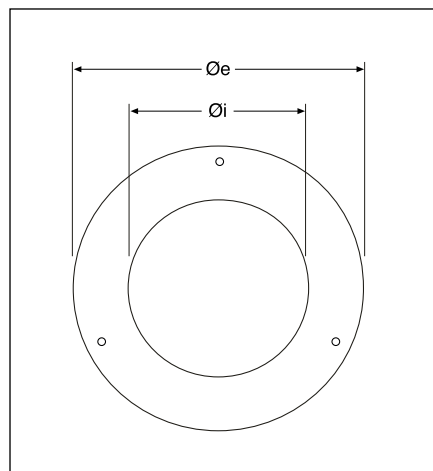

Øi	Øe	COD.
80	200	EIKSMROSCO3F080
100	200	EIKSMROSCO3F100


Finitura bianca e grigia a richiesta
On request white and grey finish

EIKSMROS45...



Rosone copriforo ellittico per innesto a 45°.

Ceiling elliptic hole cover for 45° connection.

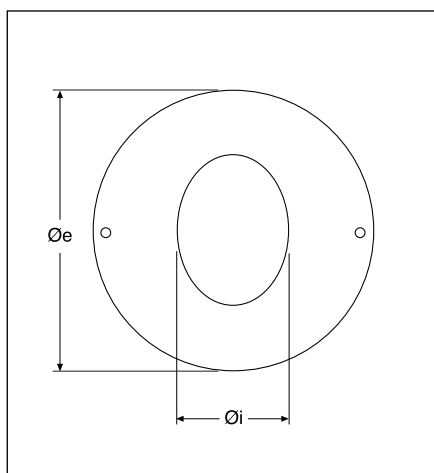


Øi	Øe	COD.
80	200	EIKSMROS45080
100	250	EIKSMROS45100

EIKNROS...



Rosone copriforo in silicone.

Silicon ceiling hole cover.

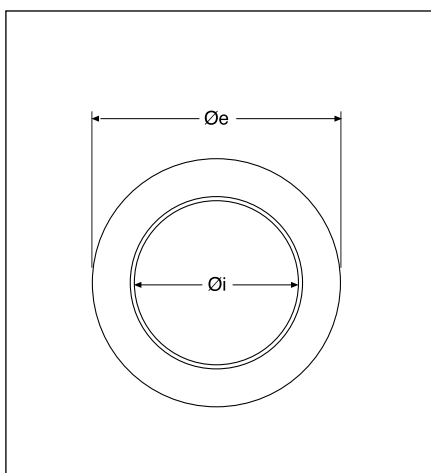


Øi	Øe	COD.
80	135	EIKNROS080
100	165	EIKNROS100

EIKSMUNICO25...



Raccordo unico con rosone Ø esterno 250 mm.

Adaptor with hole cover external Ø 250 mm.

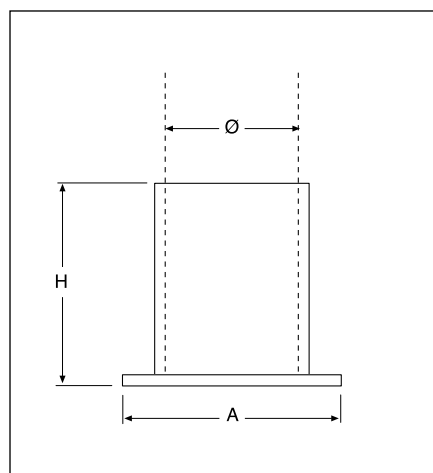

Ø	COD.	A	H
80	EIKSMUNICO2508	250	145
100	EIKSMUNICO2510	250	145


MONOPARETE SMALTATO - ENAMELLED SINGLE WALL

EIKSMUNITEL25...



Raccordo unico telescopico con rosone
Ø esterno 250 mm.

*Adjustable adaptor with hole cover external
Ø 250 mm.*

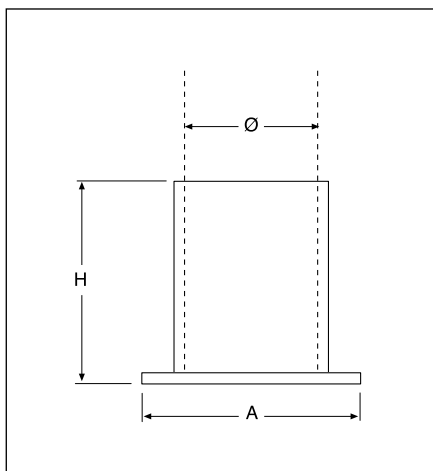


Ø	COD.	A	H
80	EIKSMUNITEL2508	250	250
100	EIKSMUNITEL2510	250	250

EIKSMPMBGRAD...



Passaggio a muro completo di rosone
(battuta).

*Passing-through with hole cover
(in abutment).*

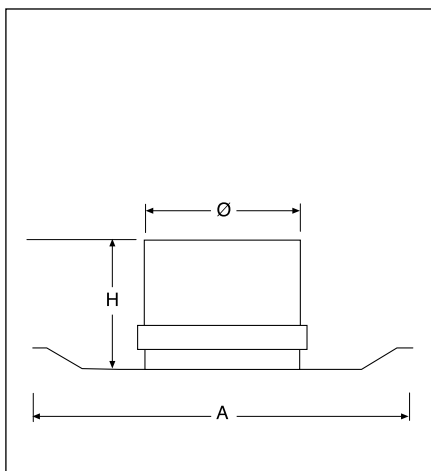


Ø	COD.	A	H
80	EIKSMPMBGRAD080	220	70
100	EIKSMPMBGRAD100	#	#

EIKSMPMPGRAD...



Passaggio a muro completo di rosone
(passante).

*Passing-through with hole cover
(passing).*

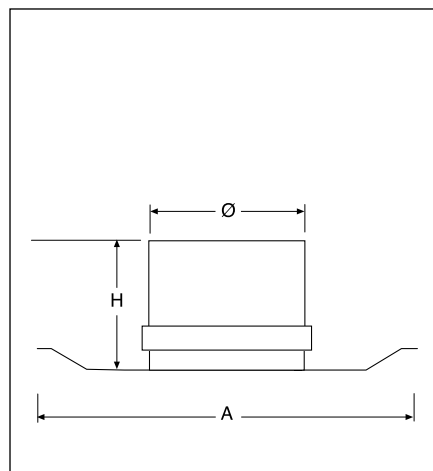

Ø	COD.	A	H
80	EIKSMPMPGRAD080	220	70
100	EIKSMPMPGRAD100	#	#

Finitura bianca e grigia a richiesta
On request white and grey finish


Non disponibile
Not available

EIKSMCOLSS...



Collare a muro.

Wall bracket.

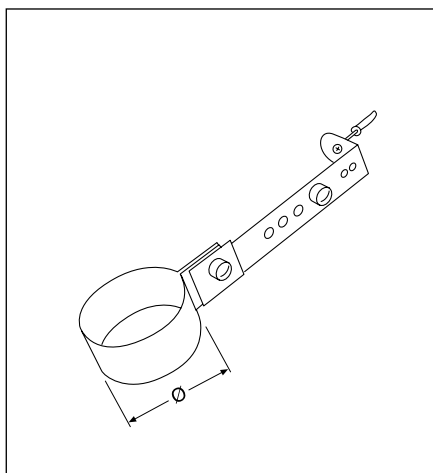


Ø	COD.
80	EIKSMCOLSS080
100	EIKSMCOLSS100

EIKSMCFT...



Collare a muro con tassello.

Wall bracket with anchor bolt.

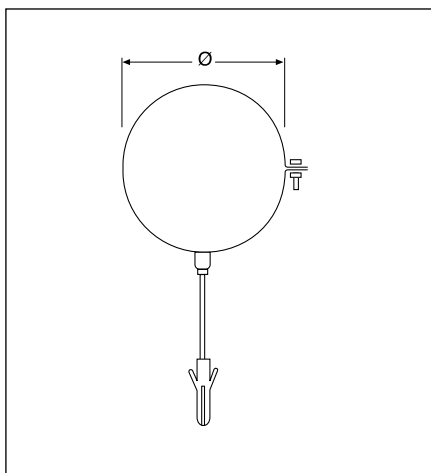


Ø	COD.
80	EIKSMCFT080
100	EIKSMCFT100

EIKSM12RAI08/10



Aumento di sezione.

Increaser.

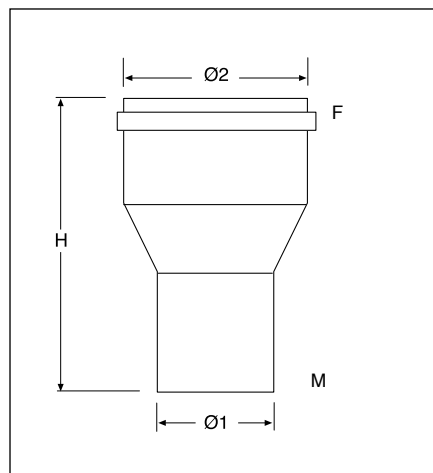

Ø1	Ø2	COD.	H
80	100	EIKSM12RAI08/10	165


MONOPARETE SMALTATO - ENAMELLED SINGLE WALL

EIKSM12RCI10/08



Riduzione di sezione.

Reducer.

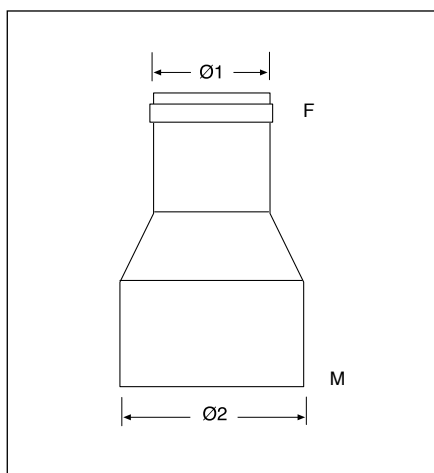


Ø1	Ø2	COD.	H
80	100	EIKSM12RCI10/08	165

EIK1GN...



Guarnizione di tenuta in silicone nero.

Silicon black seal.

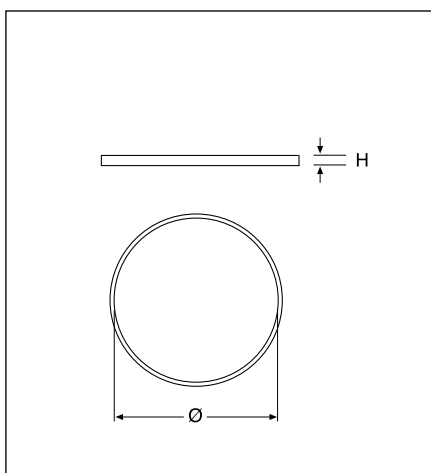

Ø	COD.	H
80	EIK1GN080	10
100	EIK1GN100	10

EIKLUBGN



Lubrificante per guarnizione.

Lubricant for seal.

COD.
EIKLUBGN

Finitura bianca e grigia a richiesta
On request white and grey finish

KIT FERELUX Ø 80



Kit EdilFERELUX 1.2 Ø 80 mm.

Kit EdilFERELUX 1.2 Ø 80 mm.

Contiene / Contains

1	Tubo da 1 m <i>Pipe 1 m</i>
1	Tubo da 0,50 m <i>Pipe 0.50 m</i>
1	Raccordo a "T" 90° con tappo <i>90° tee with tee cap</i>
1	Curva a 90° <i>Elbow 90°</i>
1	Collare con tassello <i>Wall bracket with anchor bolt</i>
1	Rosone con bombatura <i>Ceiling hole cover with camber</i>

Ø	COD.
80	EIKSMA12FFMKI08