



EdilPROTEK

DOPPIA PARETE POLIPROPILENE/INOX
POLYPROPYLENE/INOX DOUBLE WALL



SISTEMA DOPPIA PARETE PPS-INOX EdilPROTEK

Il sistema **doppia parete PPS-inox EdilPROTEK** è composto da elementi componibili rigidi, realizzati in polipropilene arricchito di spessore minimo 1,5 mm e protetti da una parete esterna in acciaio inox AISI 304 con finitura lucida BA di spessore 0,4 mm, conformi agli standard previsti dalla marcatura CE secondo la normativa EN 14471. Gli elementi modulari hanno innesto classico a bicchiere maschio-femmina calibrato con guarnizione di tenuta a triplice labbro, conforme alla normativa europea EN 14241-1.

Il sistema è adatto a ricevere i fumi con temperatura massima di esercizio fino a 120 °C e pressione massima 200 Pa.

Riferimento normativo e designazione

Marcatura prodotto secondo normativa europea CE 0476 EN 14471.

T120 P1 W 2 000 LE E UO

T120 H1 W 2 000 LE E UO

Utilizzo

Sistema fumario e canale da fumo plastico asserviti a generatori a condensazione, cappe cucina per uso domestico.

Applicazione

Installazione interna ed esterna.

Diametri disponibili - mm

60/80 A RICHIESTA

80/100 - 100/120

Guarnizione in EPDM compresa e montata.

DOUBLE WALL PPS-INOX EdilPROTEK SYSTEM

Double wall PPS-inox EdilPROTEK system is composed by modular rigid elements, made of polypropylene, minimum thickness of 1.5 mm and protected by an external wall in stainless steel AISI 304 with finish polished BA, thickness 0.4 mm, according to the standards set out by the European CE mark, EN 14471. The modular elements have classic male-female junction calibrated with triple seal lip gasket, conforming to European standard EN 14241-1.

The system is suitable to receive flue gases with a maximum operating temperature of 120 °C and maximum pressure of 200 Pa.

Normative references and designations

Product marking according to the European standard CE 0476 EN 14471.

T120 P1 W 2 000 LE E UO

T120 H1 W 2 000 LE E UO

Utilizations

Flue systems and flue duct subservient to condensation generators, domestic kitchen hoods.

Application

Internal and external installation.

Available diameters - mm

60/80 ON REQUEST

80/100 - 100/120

All the items are complete of EPDM seal.

POLIPROPILENE/INOX - POLYPROPYLENE/INOX

EIKIPLTA20S...



Elemento lineare da 2 m.

Pipe 2 m.

EIKIPLTA1S...



Elemento lineare da 1 m.


Pipe 1 m.

EIKIPLTA5S...




Elemento lineare da 0,50 m.


Pipe 0.50 m.

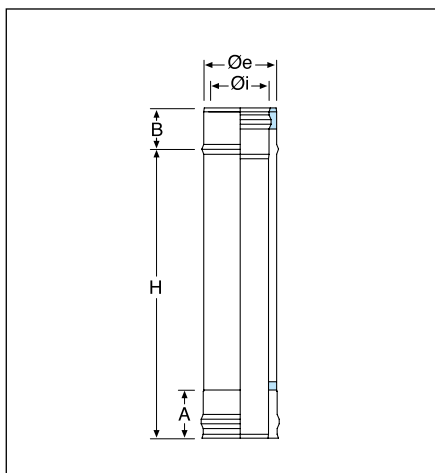

Øi	Øe	COD.	A	B	H
60	80	EIKIPLTA20S060	65	54	1940
80	100	EIKIPLTA20S080	#	#	#

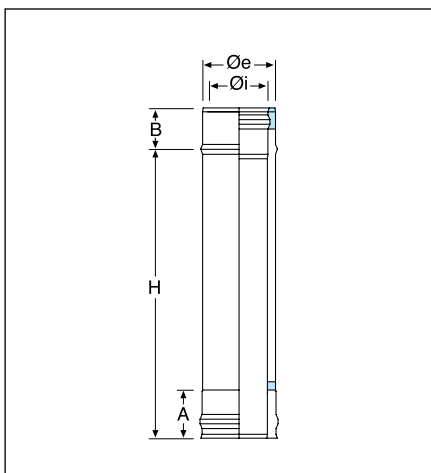

Øi	Øe	COD.	A	B	H
60	80	EIKIPLTA1S060	65	54	940
80	100	EIKIPLTA1S080	65	54	940
100	120	EIKIPLTA1S100	65	54	940

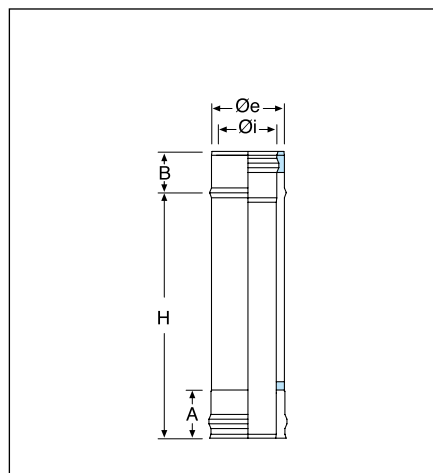


Øi	Øe	COD.	A	B	H
60	80	EIKIPLTA5S060	65	54	440
80	100	EIKIPLTA5S080	65	54	440
100	120	EIKIPLTA5S100	65	54	440

EIKIPLTA2S...



Elemento lineare da 0,25 m.

Pipe 0.25 m.

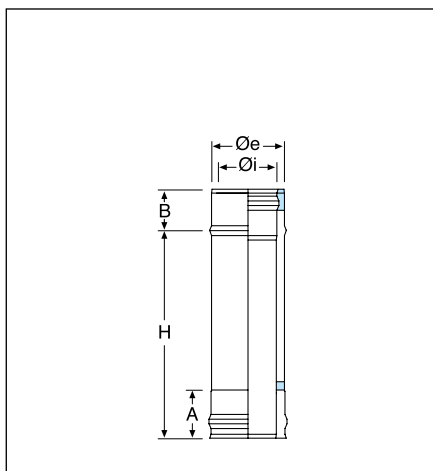


Øi	Øe	COD.	A	B	H
60	80	EIKIPLTA2S060	65	54	190
80	100	EIKIPLTA2S080	65	54	190
100	120	EIKIPLTA2S100	65	54	190

EIKIPLGA87S...



Curva a 87°.

Elbow 87°.

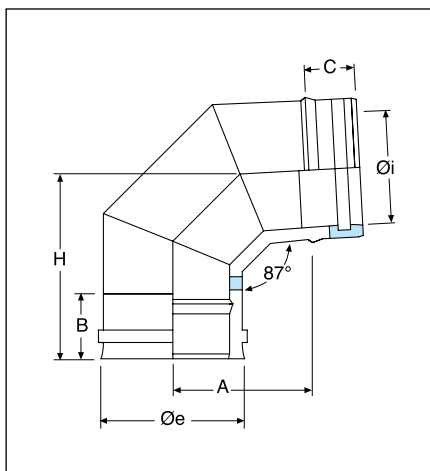


Øi	Øe	COD.	A	B	C	H
60	80	EIKIPLGA87S060	81	65	54	147
80	100	EIKIPLGA87S080	86	65	54	154
100	120	EIKIPLGA87S100	96	65	54	154

EIKIPLGA45S...



Curva a 45°.

Elbow 45°.

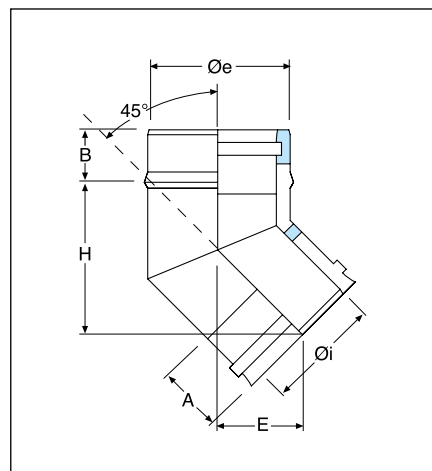

Øi	Øe	COD.	A	B	E	H
60	80	EIKIPLGA45S060	65	54	33	90
80	100	EIKIPLGA45S080	65	54	35	95
100	120	EIKIPLGA45S100	65	54	38	100


POLIPROPILENE/INOX - POLYPROPYLENE/INOX

EIKIPLGA30S...



Curva a 30°.

Elbow 30°.

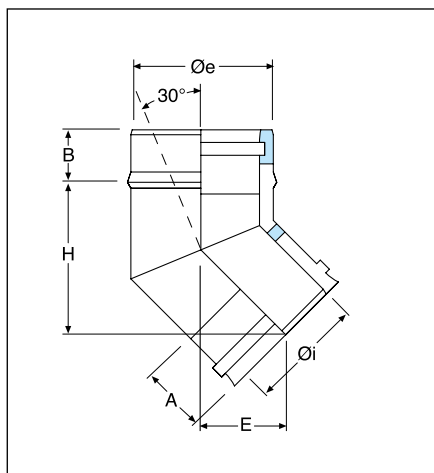


Øi	Øe	COD.	A	B	E	H
60	80	EIKIPLGA30S060	65	54	48	139
80	100	EIKIPLGA30S080	65	54	48	139
100	120	EIKIPLGA30S100	65	54	48	139

EIKIPLPF...



Elemento per prelievo fumi.

Fumes test section with threaded sleeve.

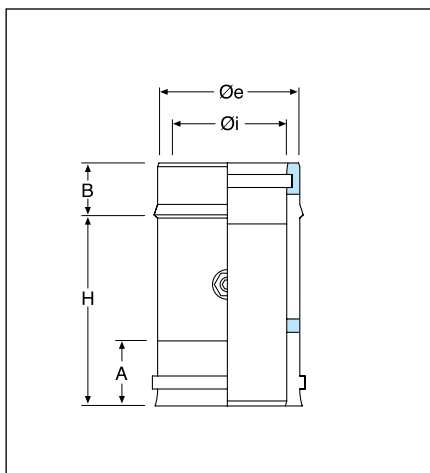


Øi	Øe	COD.	A	B	H
60	80	EIKIPLPF060	65	54	190
80	100	EIKIPLPF080	65	54	190
100	120	EIKIPLPF100	65	54	190

EIKIPLT90S...



Raccordo a "T" 87°.

87° tee.

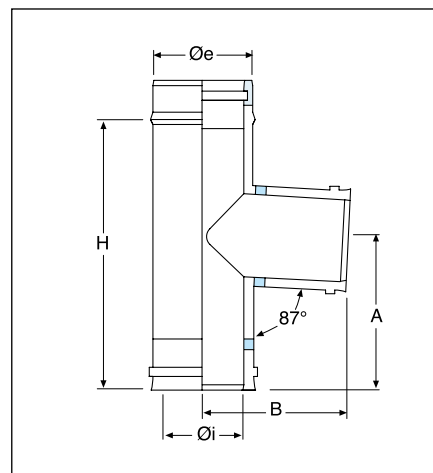


Øi	Øe	COD.	A	B	H
60	80	EIKIPLT90S060	120	120	190
80	100	EIKIPLT90S080	120	130	190
100	120	EIKIPLT90S100	160	140	270

EIKIPLISPSS...



Elemento con portello tondo per ispezione.

Element with round test point.

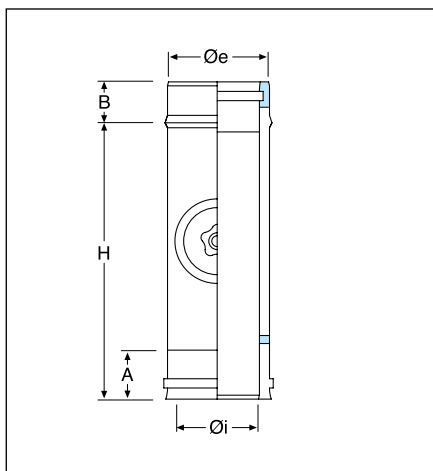


Øi	Øe	COD.	A	B	H
60	80	EIKIPLISPSS060	65	54	190
80	100	EIKIPLISPSS080	65	54	190
100	120	EIKIPLISPSS100	65	54	270

EIKIPLSCARSS...



Scarico condensa.

Tee cap with condense drain.

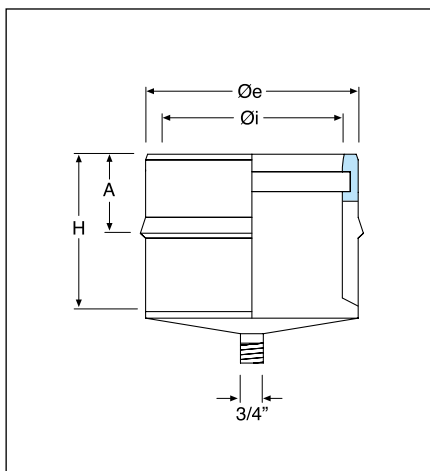


Øi	Øe	COD.	A	H
60	80	EIKIPLSCARSS060	54	65
80	100	EIKIPLSCARSS080	54	65
100	120	EIKIPLSCARSS100	54	65

EIKIPLTC...



Tappo cieco.

Tee cap.

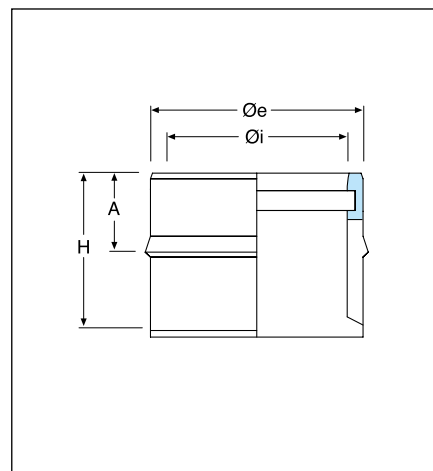

Øi	Øe	COD.	A	H
60	80	EIKIPLTC060	54	65
80	100	EIKIPLTC080	54	65
100	120	EIKIPLTC100	54	65


POLIPROPILENE/INOX - POLYPROPYLENE/INOX

EIKIPLISS...



Piastra intermedia.

Intermediate anchor plate.

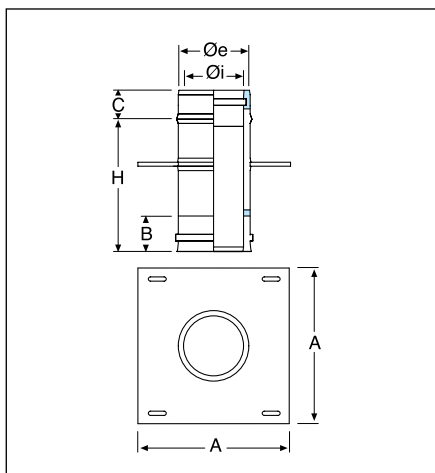


Øi	Øe	COD.	A	B	C	H
60	80	EIKIPLISS060	200	65	54	190
80	100	EIKIPLISS080	200	65	54	190
100	120	EIKIPLISS100	220	65	54	190

EKIPLRCIDP...



Raccordo caldaia.

Boiler adaptor.

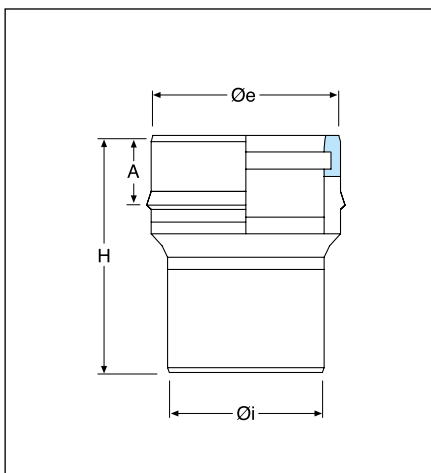


Øi	Øe	COD.	A	H
60	80	EKIPLRCIDP060	54	250
80	100	EKIPLRCIDP080	54	250
100	120	EKIPLRCIDP100	54	250

EIKACCDPC...



Cappello cinese.

Rain cap.

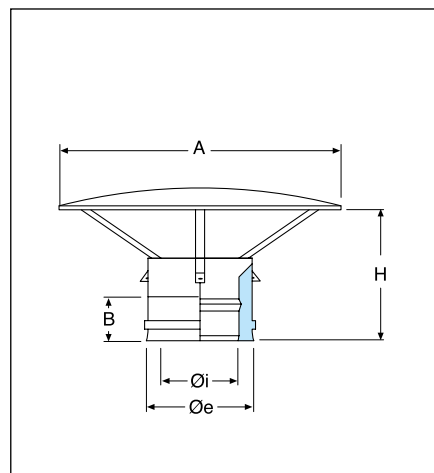


Øi	Øe	COD.	A	B	H
60	80	EIKACCDPC060	180	65	185
80	100	EIKACCDPC080	230	65	205
100	120	EIKACCDPC100	289	65	205

EIKATADPC...



Terminale anti intemperie.

Anti draught terminal.

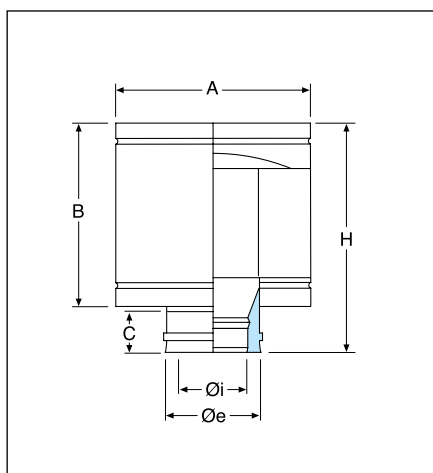


Øi	Øe	COD.	A	B	C	H
60	80	EIKATADPC060	200	165	65	240
80	100	EIKATADPC080	200	185	65	240
100	120	EIKATADPC100	250	185	65	240

EIKATTCDPC...



Terminale tronco conico.

Venturi cone terminal.

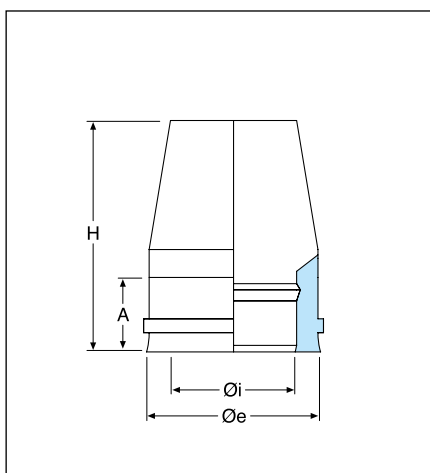


Øi	Øe	COD.	A	H
60	80	EIKATTCDPC060	65	235
80	100	EIKATTCDPC080	65	235
100	120	EIKATTCDPC100	65	235

EIK3GN...



Guarnizione di tenuta in EPDM nero.

EPDM black seal.

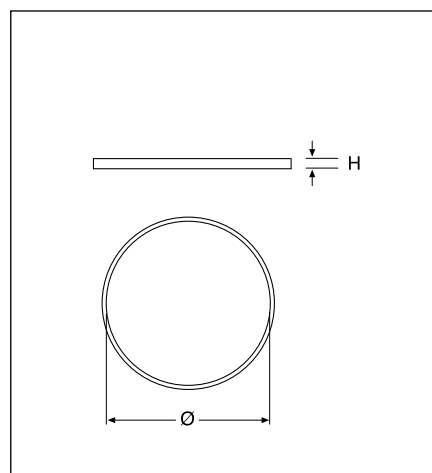

Ø	COD.	H
60	EIK3GN060	10
80	EIK3GN080	10
100	EIK3GN100	10


POLIPROPILENE/INOX - POLYPROPYLENE/INOX

EIKBM...



Bicchieri di montaggio

Assembly element.

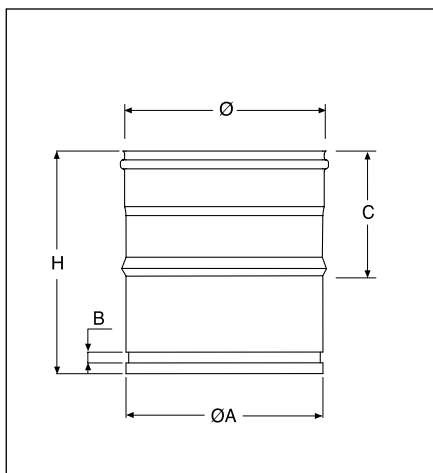


Øe	COD.	ØA	B	C	H
80	EIKBM080	78	10	80	135
100	EIKBM100	98	10	80	135
120	EIKBM120	118	10	80	135

EIKCFT...



Collare a muro con tassello.

Wall bracket with anchor bolt.

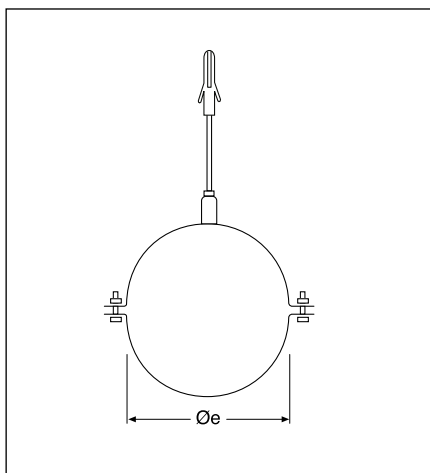


Øe	COD.
80	EIKCFT080
100	EIKCFT100
120	EIKCFT120

EIKCOLSS...



Collare a muro.

Wall bracket.

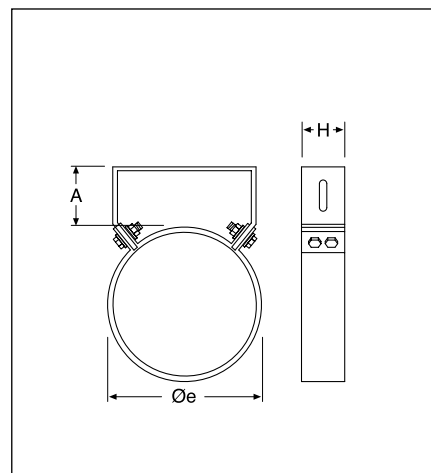

Øe	COD.	A	H
80	EIKCOLSS080	50	40
100	EIKCOLSS100	50	40
120	EIKCOLSS120	50	40




In fase di ordine: considerare sempre il diametro esterno della canna fumaria • When ordering: always consider the outside diameter of the flue chimney

EIKCOLSSREG...




Collare a muro regolabile da 50 a 100 mm.

Wall bracket adjustable from 50 to 100 mm.

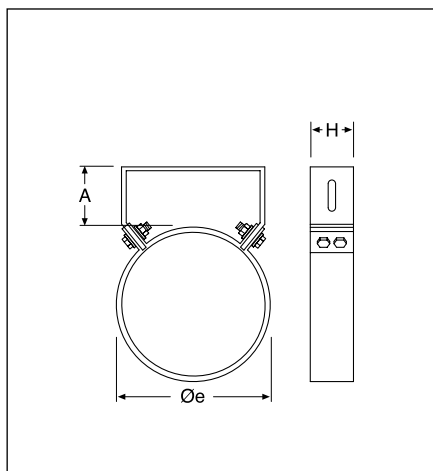


Øe	COD.	A	H
80	EIKCOLSSREG080	50-100	40
100	EIKCOLSSREG100	50-100	40
120	EIKCOLSSREG120	50-100	40

EIKFPPSSAL...

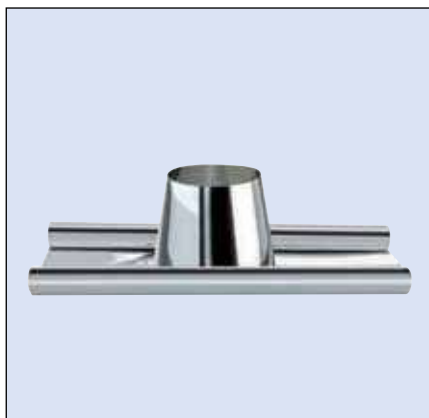


Faldale piano con base in alluminio.

Flat flashing with aluminum base.

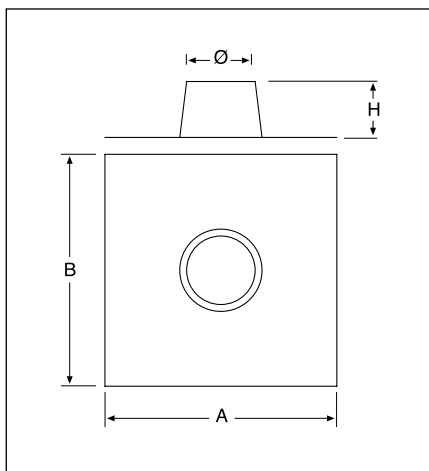


Øi	Øe	COD.	A	B	H
60	80	EIKFPPSSAL080	450	550	120
80	100	EIKFPPSSAL100	450	550	120
100	120	EIKFPPSSAL120	550	650	130

EIKFPS5SAL...

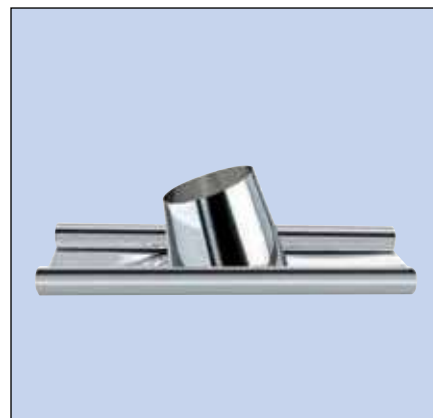

Faldale regolabile da 5° a 30° con base in alluminio.

Adjustable flashing from 5° to 30° with aluminum base.

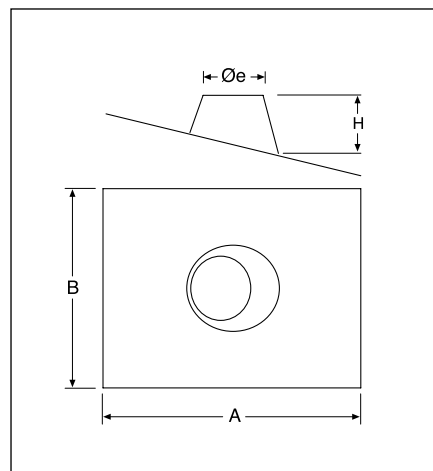

Øi	Øe	COD.	A	B	H
60	80	EIKFPS5SAL080	750	450	120
80	100	EIKFPS5SAL100	750	450	120
100	120	EIKFPS5SAL120	750	450	130




POLIPROPILENE/INOX - POLYPROPYLENE/INOX

EIKCS...



Coppia di supporti per piastra.

Cantilever brackets (pair).

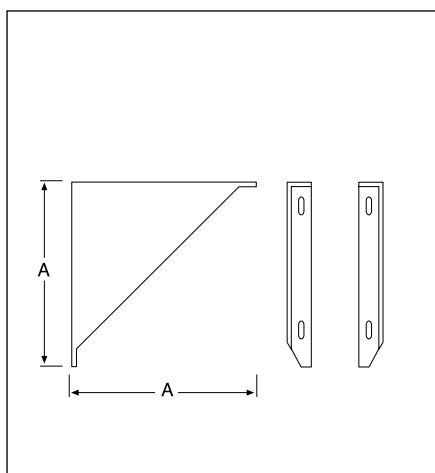


Øi	Øe	COD.	A
60	80	EIKCS080	180
80	100	EIKCS100	200
100	120	EIKCS120	220

EIKFAPS2S...



Fascetta anti intemperie.

Storm collar.

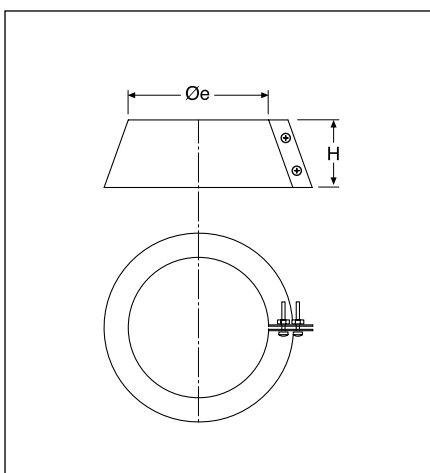


Øi	Øe	COD.	H
60	80	EIKFAPS2S080	100
80	100	EIKFAPS2S100	100
100	120	EIKFAPS2S120	100

EIKFACSS...




Fascetta di sicurezza.

Locking band.

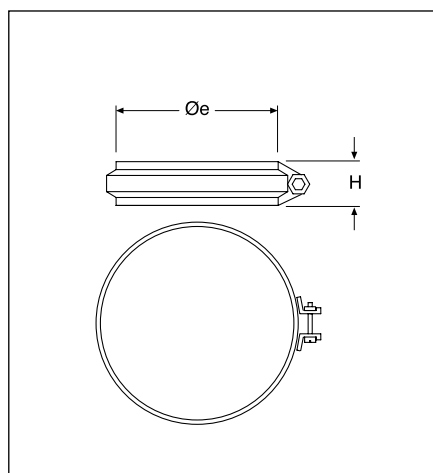

Øe	COD.	H
80	EIKFACSS080	20
100	EIKFACSS100	20
120	EIKFACSS120	20

EIKLUBGN

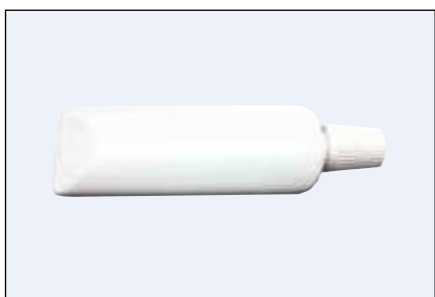

Lubrificante per guarnizione.

Lubricant for seal.

COD.
EIKLUBGN



In fase di ordine: considerare **sempre il diametro esterno** della canna fumaria • When ordering: **always consider the outside diameter** of the flue chimney

