



EdiPELLET 1.2

ACCIAIO AL CARBONIO
CARBON STEEL

EdiPELLET 1.2



SISTEMA MONOPARETE EdiPELLET 1,2 mm

Il sistema **monoparete EdiPELLET 1,2 mm** è composto da elementi componibili rigidi, di spessore minimo 1,2 mm, realizzati in acciaio al carbonio verniciato nero lucido per i diametri 80 e 100 e verniciato nero opaco per il diametro 120. Il sistema è conforme agli standard previsti dalla marcatura CE secondo la normativa EN 1856-2. Gli elementi modulari hanno innesto classico a bicchiere maschio-femmina calibrato con guarnizione di tenuta a triplice labbro, da utilizzarsi solo con temperature non superiori a 250 °C e pressioni positive fino a 200 Pa, conforme alla normativa europea EN 14241-1, e giunzione meccanica con semplice innesto.

Riferimento normativo e designazione

Marcatura prodotto secondo normativa europea CE EN 1856-2.

T200 P1 D Vm L01120 O 30 M

T600 N1 D Vm L01120 G375 NM

Utilizzo

Condotti, canali da fumo, camini metallici, esalazioni aria asserviti a generatori di calore di tipo stufe a pellet, biocombustili e similari.

Applicazione

Installazione interna.

Diametri disponibili - mm

80 - 100. FINITURA LUCIDA

120 A RICHIESTA. FINITURA OPACA

Guarnizione in silicone compresa e montata.

SINGLE WALL EdiPELLET 1.2 mm SYSTEM

Single wall EdiPELLET 1.2 mm system is composed by modular rigid elements, minimum thickness of 1.2 mm, made of carbon steel glossy black painted for the diameters 80 and 100 and matt black painted for the diameter 120. The system complies with standards set out by the European CE mark, EN 1856-2. The modular elements have classic male-female junction calibrated, with triple seal lip gasket, for exclusive use with temperatures up to 250 °C and positive pressure up to 200 Pa, conforming to European standard EN 14241-1, and simple mechanical connection between the elements.

Normative references and designation

Product marking according to the European standard CE EN 1856-2.

T200 P1 D Vm L01120 O 30 M

T600 N1 D Vm L01120 G375 NM

Utilizations

Ducts, flue pipes, metal chimneys, air conduction subservient to pellet stoves, biofuels and similar.

Application

Internal installation.

Available diameters - mm

80 - 100. GLOSSY FINISH

***120 ON REQUEST.** MATT FINISH*

All the items are complete of silicone seal.


MONOPARETE PER PELLET - SINGLE WALL FOR PELLET

EIKFELTA20S...



Elemento lineare da 2 m.

Pipe 2 m.

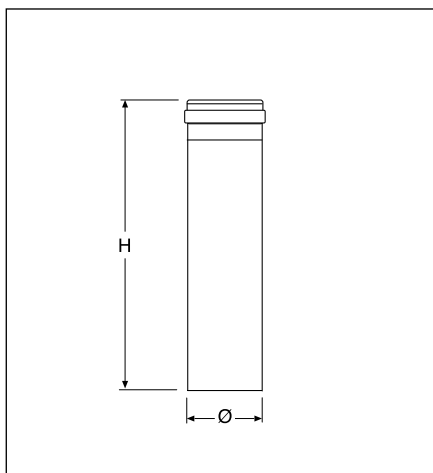


Ø	COD.	H	PCS PALLET
80	EIKFELTA20S080	2000	84
100	EIKFELTA20S100	2000	66
120	EIKFELTA20S120	#	#

EIKFELTA15S...



Elemento lineare da 1,50 m.

Pipe 1.50 m.

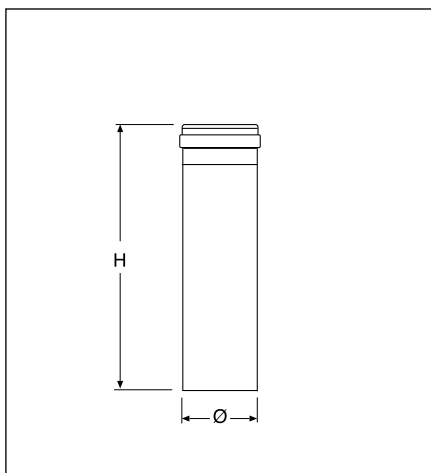


Ø	COD.	H
80	EIKFELTA15S080	1500
100	EIKFELTA15S100	1500
120	EIKFELTA15S120	#

EIKFELTA1S...



Elemento lineare da 1 m.

Pipe 1 m.

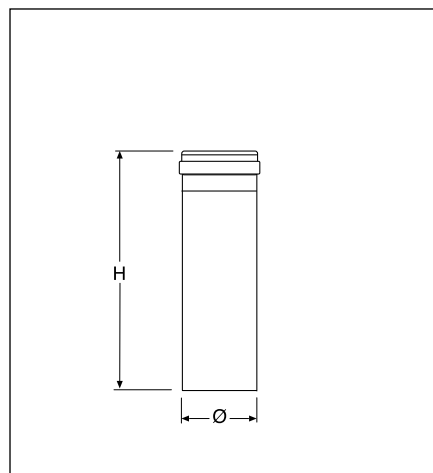

Ø	COD.	H
80	EIKFELTA1S080	1000
100	EIKFELTA1S100	1000
120	EIKNFETA1SGM12	1000

Finitura bianca e grigia a richiesta
White and gray finish on request


Non disponibile
Not available

EIKFELTA5S...



Elemento lineare da 0,50 m.

Pipe 0.50 m.

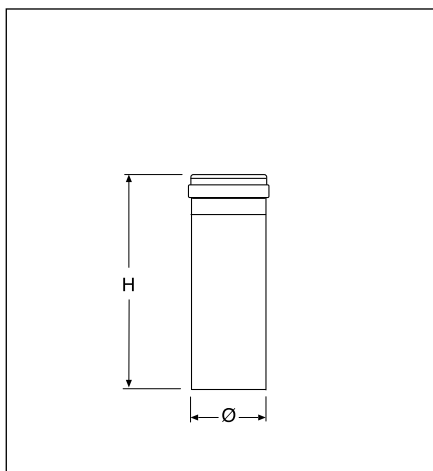


Ø	COD.	H
80	EIKFELTA5S080	500
100	EIKFELTA5S100	500
120	EIKNFETA50SGM12	500

EIKFELTA25S...



Elemento lineare da 0,25 m.

Pipe 0.25 m.

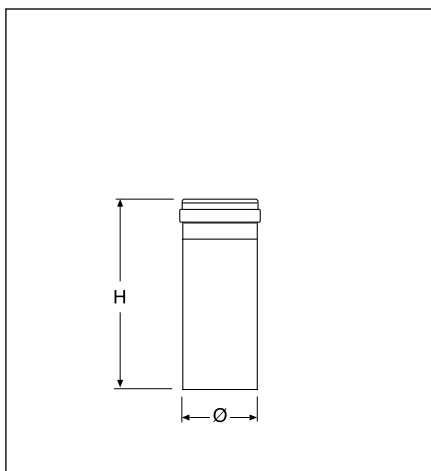


Ø	COD.	H
80	EIKFELTA25S080	250
100	EIKFELTA25S100	250
120	EIKNFETA25SGM12	250

EIKFELEPS4S...



Elemento singolo telescopico.

Adjustable pipe.

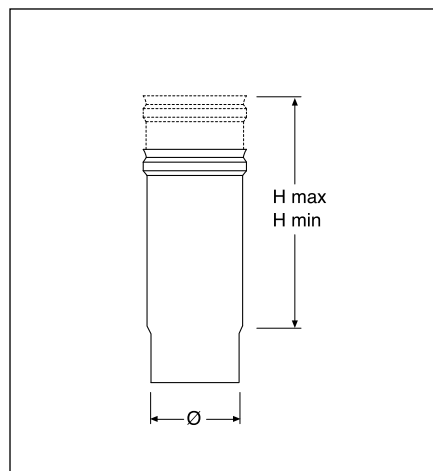

Ø	COD.	H min	H max
80	EIKFELEPS4S080	250	400
100	EIKFELEPS4S100	250	400
120	EIKNFEEPS4SGM12	250	400


MONOPARETE PER PELLET - SINGLE WALL FOR PELLET

EIKFELEPS4SCF...



Elemento telescopico completo di fascetta reggitubo.

Adjustable pipe with band.

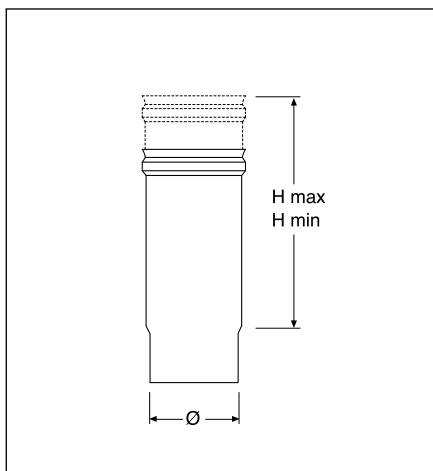


Ø	COD.	H min	H max
80	EIKFELEPS4SCF08	250	400
100	EIKFELEPS4SCF10	250	400
120	EIKFEPS4SCFG12	250	400

EIKFELGA90S...



Curva a 90°.

Elbow 90°.

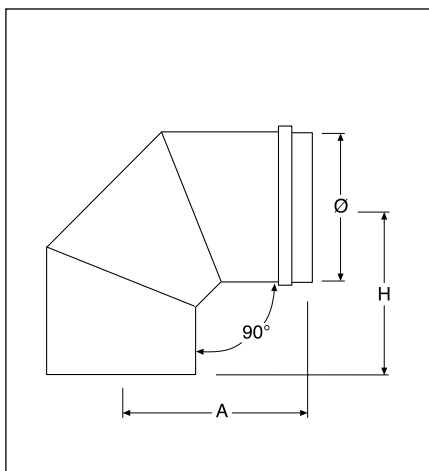


Ø	COD.	A	H
80	EIKFELGA90S080	154	159
100	EIKFELGA90S100	163	168
120	EIKNFEGA90GM12	172	180

EIKFELGA90SI...



Curva a 90° con ispezione.

Elbow 90° with inspection door.

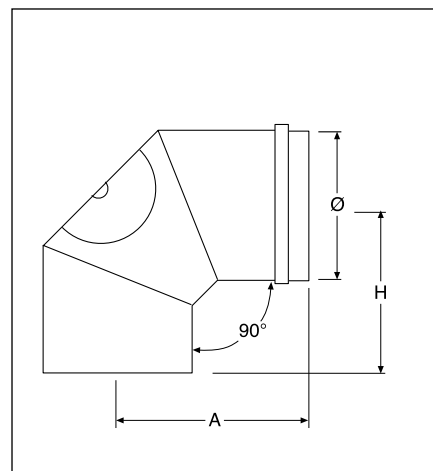


Ø	COD.	A	H
80	EIKFELGA90SI080	154	159
100	EIKFELGA90SI100	163	168
120	EIKNFEGA90IGM12	172	180

EIKFELGA45S...



Curva a 45°.

Elbow 45°.

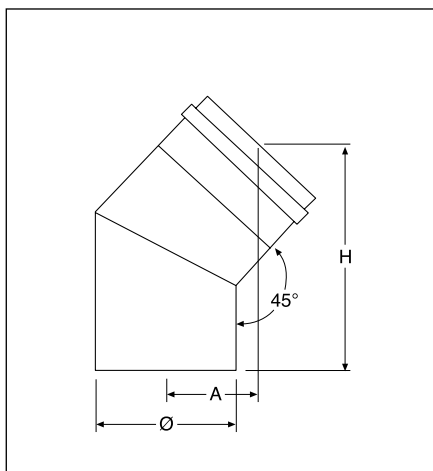


Ø	COD.	A	H
80	EIKFELGA45S080	65	162
100	EIKFELGA45S100	68	169
120	EIKNFEGA45GM12	71	175

EIKNFELGA90A2...



Curva a 90° a due spicchi.

Elbow 90° with two segments.

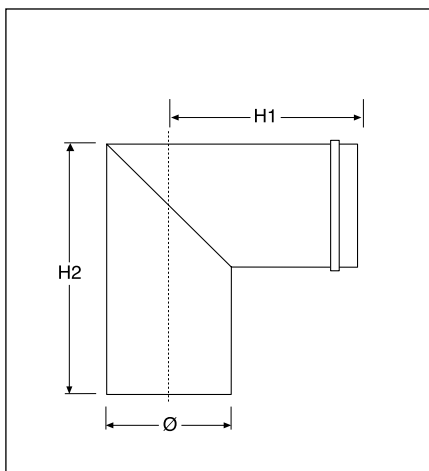


Ø	COD.	H1	H2
80	EIKNFELGA90A208	125	130
100	EIKNFELGA90A210	140	135
120	EIFEGA90SPAN12	157	140

EIKFELTTCFFM...



Raccordo a "T" 90° FFM con tappo cieco.

Tee 90° FFM with tee cap.

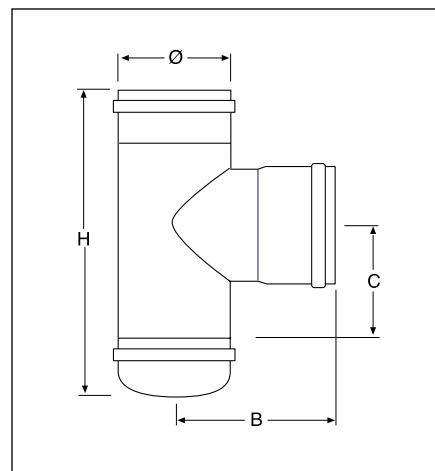

Ø	COD.	B	C	H
80	EIKFELTTCFFM08	115	100	220
100	EIKFELTTCFFM10	125	110	225
120	EIKFETTCFFMGM12	140	140	225


MONOPARETE PER PELLET - SINGLE WALL FOR PELLET

EIKFELTTCMFM...



Raccordo a "T" 90° MFM con tappo cieco.

Tee 90° MFM with tee cap.

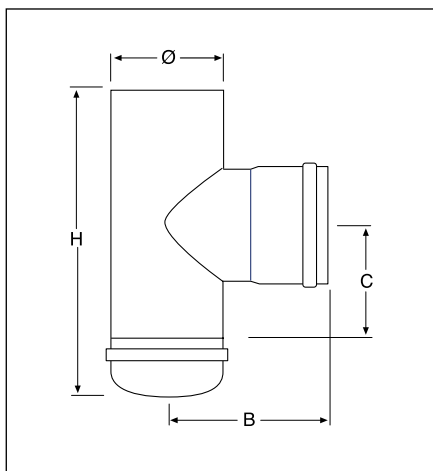


Ø	COD.	B	C	H
80	EIKFELTTCMFM08	115	110	220
100	EIKFELTTCMFM10	125	110	225
120	EIKFETTCMFMGM12	140	140	225

EIKFELTTCMMM...



Raccordo a "T" 90° MMM con tappo cieco.

Tee 90° MMM with tee cap.

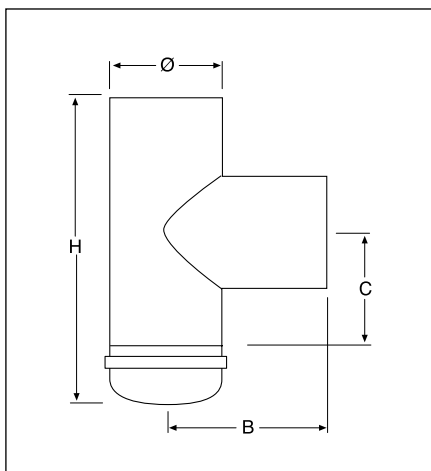


Ø	COD.	B	C	H
80	EIKFELTTCMMM08	120	100	220
100	EIKFELTTCMMM10	130	110	225
120	EIKFETTCMMMGM12	140	110	225

EIKFELT69SU...



Raccordo a "T" 90° uscita ridotta Ø 80 mm femmina con tappo cieco

Tee 90° reduced Ø 80 mm female with tee cap.

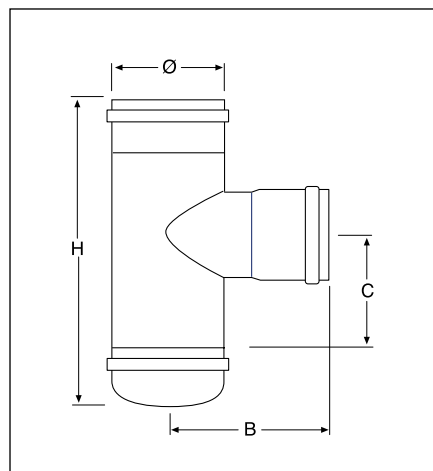

Ø	COD.	B	C	H
80	EIKFELT69SU080	#	#	#
100	EIKFELT69SU100	128	110	220
120	EIKNFET69SUGM12	136	110	220


Finitura bianca e grigia a richiesta
White and gray finish on request

Non disponibile
Not available

EIKFELT69SI...



Raccordo a "T" 90° chiuso FFM con ispezione.
Tee 90° closed FFM with inspection door.

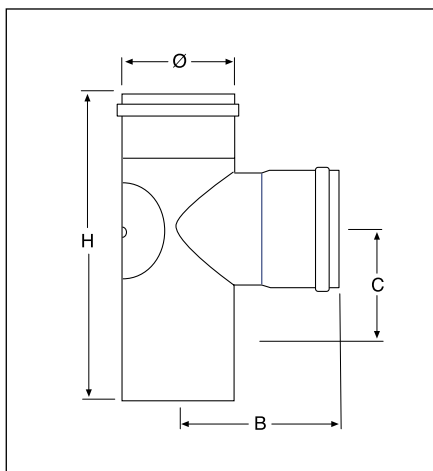


Ø	COD.	B	C	H
80	EIKFELT69SI080	115	100	220
100	EIKFELT69SI100	125	110	225
120	EIKNFET69SIGM12	140	120	225

EIKFELTB...



Elemento a becco.
Beak-shaped element.

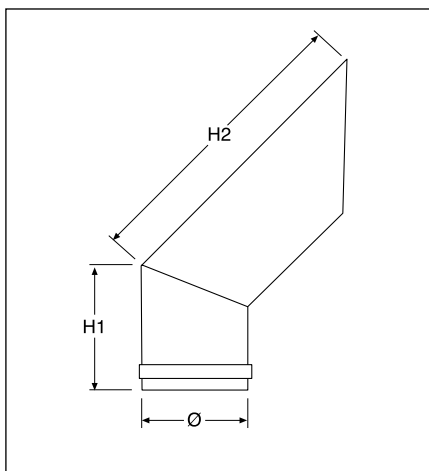


Ø	COD.	H1	H2
80	EIKFELTB080	108	270
100	EIKFELTB100	108	270
120	EIKFETB120	108	270

EIKFELFFA...



Manicotto femmina - femmina.
Double female adaptor.

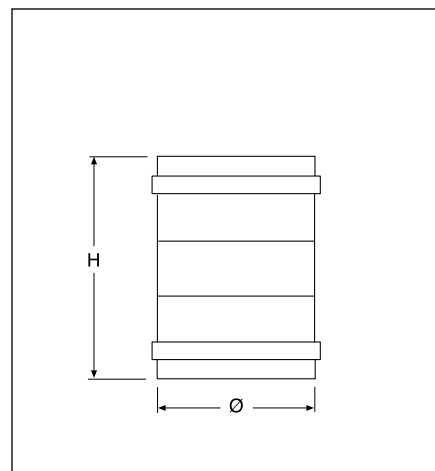

Ø	COD.	H
80	EIKFELFFA080	140
100	EIKFELFFA100	140
120	EIKNFEFFAGM12	140


MONOPARETE PER PELLET - SINGLE WALL FOR PELLET

EIKFELMMA...



Manicotto maschio - maschio.

Double male adaptor.

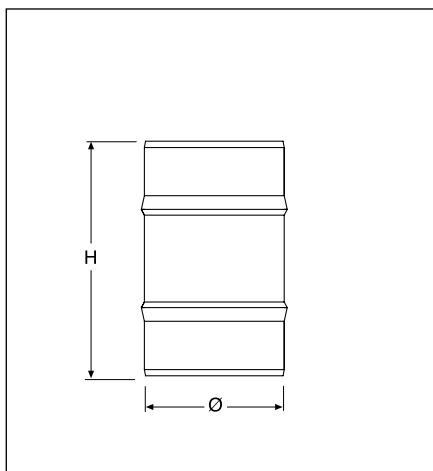


Ø	COD.	H
80	EIKFELMMA080	150
100	EIKFELMMA100	150
120	EIKFEPELMMA120	150

EIKFELGRAD...



Rosone copriforo con bombatura.

Ceiling hole cover with camber.

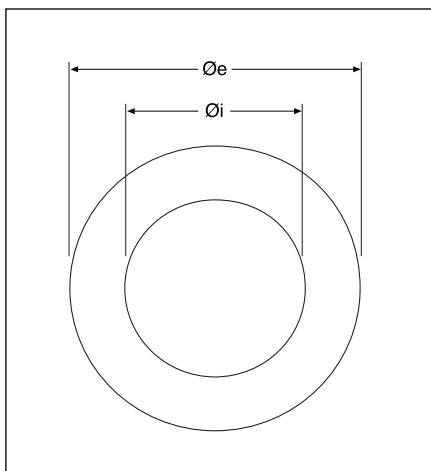


Øi	Øe	COD.
80	150	EIKFELGRAD080
100	180	EIKFELGRAD100
120	220	EIKFEOGRAD12

EIKFELROS3...



Rosone copriforo liscio con tre fori.

Ceiling hole cover smooth with three holes.

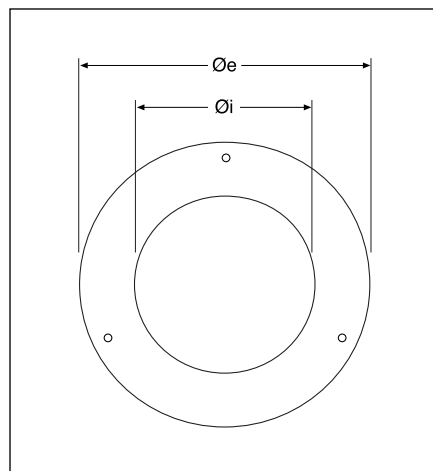


Øi	Øe	COD.
80	200	EIKFELROS3080
100	200	EIKFELROS3100
120	200	EIKFELROS3120 #

EIKFELROS45...




Rosone copriforo ellittico per innesto a 45°.

Ceiling elliptic hole cover for 45° connection.

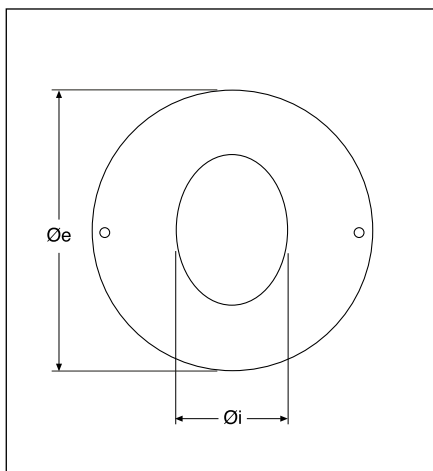


Øi	Øe	COD.
80	200	EIKFELROS45080
100	250	EIKFELROS45100
120	250	EIKFELROS45120

EIKNROS...

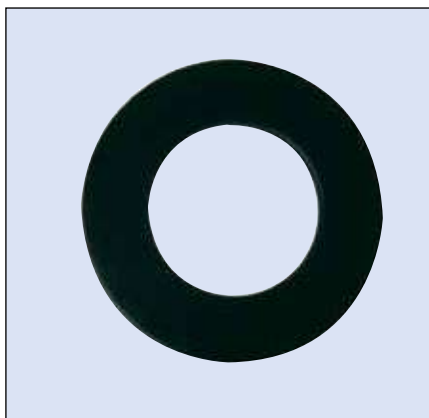

Rosone copriforo in silicone.

Silicon ceiling hole cover.

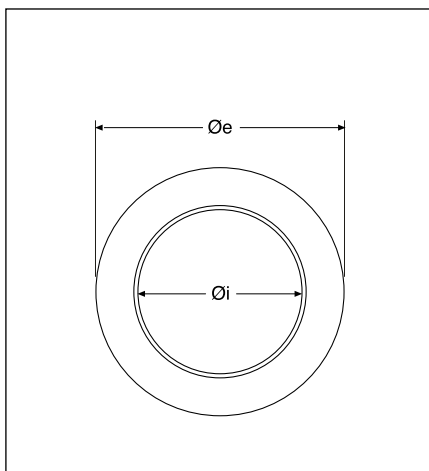


Øi	Øe	COD.
80	135	EIKNROS080
100	165	EIKNROS100
120	-	EIKNROS120 #

EIKFELUNICO18...



Raccordo unico con rosone Ø esterno 180 mm.

Adaptor with hole cover external Ø 180 mm.

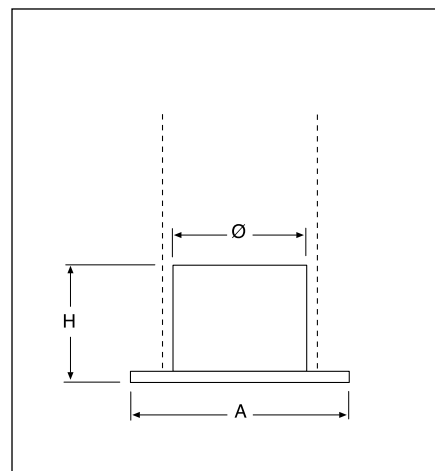

Ø	COD.	A	H
80	EIKFELUNICO1808	180	145
100	EIKFELUNICO1810	180	145
120	EIKFELUNICO1812	180	145


MONOPARETE PER PELLET - SINGLE WALL FOR PELLET

EIKFELUNICO25...



Raccordo unico con rosone Ø esterno 250 mm.

Adaptor with hole cover external Ø 250 mm.

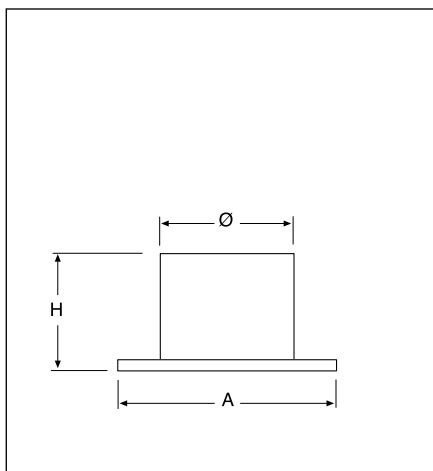


Ø	COD.	A	H
80	EIKFELUNICO2508	250	145
100	EIKFELUNICO2510	250	145
120	EIKNFEUNICO2512	250	145

EIFELUNITEL18...



Raccordo unico telescopico con rosone Ø esterno 180 mm.

Adjustable adaptor with hole cover external Ø 180 mm.

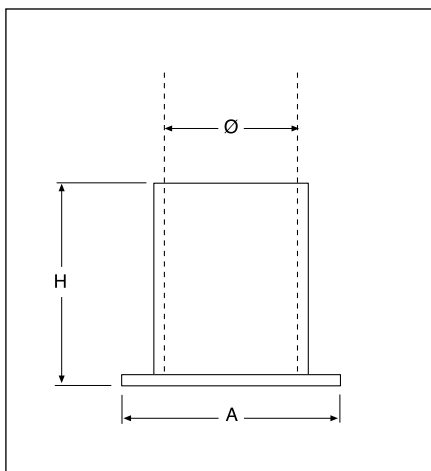


Ø	COD.	A	H
80	EIFELUNITEL1808	180	250
100	EIFELUNITEL1810	180	250
120	EINFEUNITEL1812	180	250

EIFELUNITEL25...



Raccordo unico telescopico con rosone Ø esterno 250 mm.

Adjustable adaptor with hole cover external Ø 250 mm.

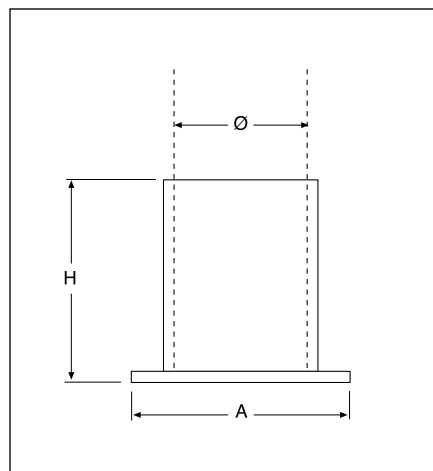

Ø	COD.	A	H
80	EIFELUNITEL2508	250	250
100	EIFELUNITEL2510	250	250
120	EINFEUNITEL2512	250	250


Finitura bianca e grigia a richiesta
White and gray finish on request

EIKFELPMBGRAD...



Passaggio a muro completo di rosone (battuta).

Passing-through with hole cover (in abutment).

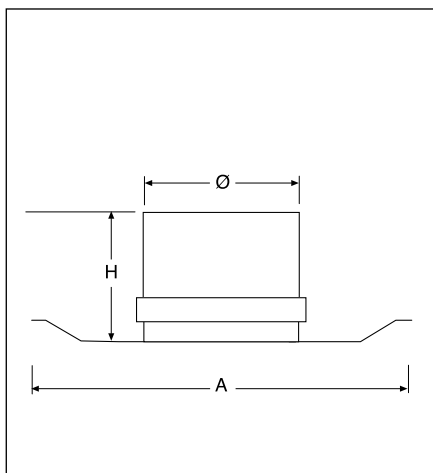


Ø	COD.	A	H
80	EIKFELPMBGRAD08	220	70
100	EIKFELPMBGRAD10	#	#
120	EIKFELPMBGRAD12	#	#

EIKFELPMPGRAD...



Passaggio a muro completo di rosone (passante).

Passing-through with hole cover (passing).

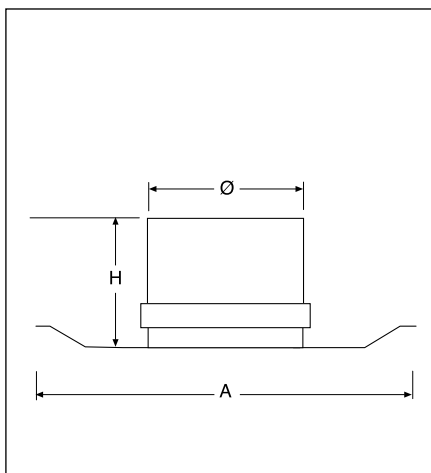


Ø	COD.	A	H
80	EIKFELPMPGRAD08	220	70
100	EIKFELPMPGRAD10	#	#
120	EIKFELPMPGRAD12	#	#

EIKFELCOLSS...



Collare a muro.

Wall bracket.

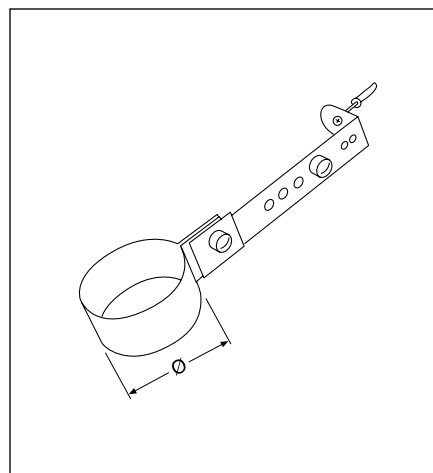

Ø	COD.
80	EIKFELCOLSS080
100	EIKFELCOLSS100
120	EIKNFECOLSS12


MONOPARETE PER PELLET - SINGLE WALL FOR PELLET

EIKFELCFT...RINF



Collare a muro rinforzato con tassello.

Reinforced wall bracket with anchor bolt.

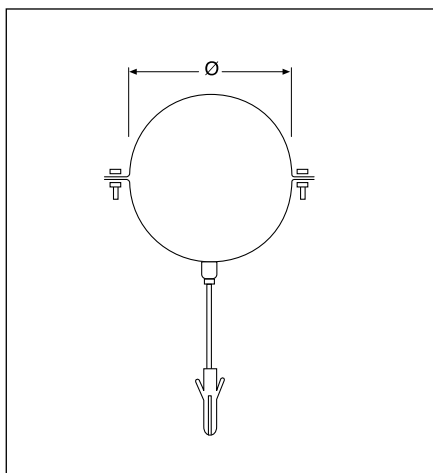


Ø	COD.
80	EIKFELCFT08RINF
100	EIKFELCFT10RINF
120	EINKFECFT12RINF

EIKFELCFT...



Collare a muro con tassello.

Wall bracket with anchor bolt.

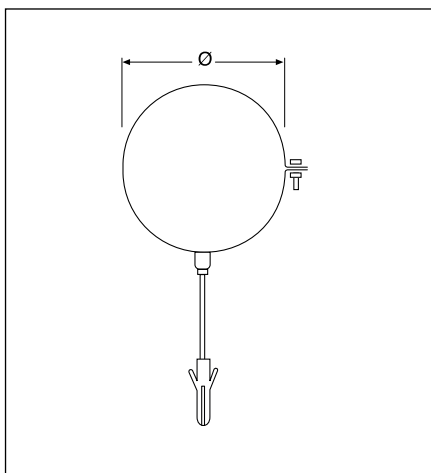


Ø	COD.
80	EIKFELCFT080
100	EIKFELCFT100
120	EIKFELCFT120 #

EIK1GN...



Guarnizione di tenuta in silicone nero.

Silicon black seal.

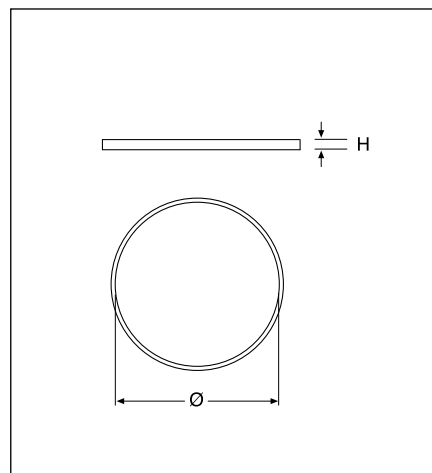


Ø	COD.	H
80	EIK1GN080	10
100	EIK1GN100	10
120	EIK1GN120	10

EIKFELRAI.....



Aumento di sezione.

Increaser.

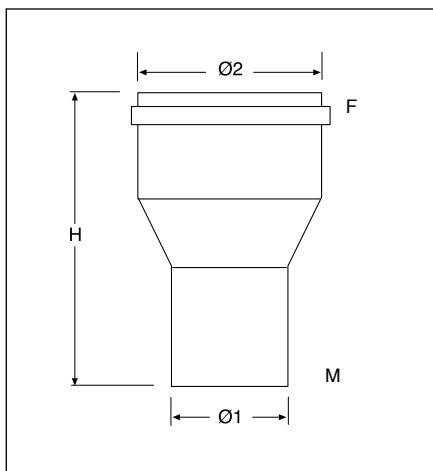


Ø1	Ø2	COD.	H
80	100	EIKFELRAI080100	165
100	120	EIKFELRAI100120	165

EIKFELRCI.....



Riduzione di sezione.

Reducer.

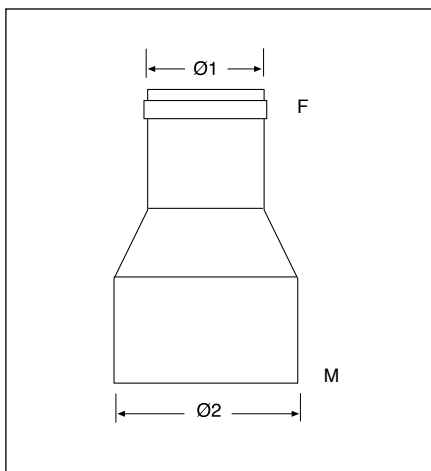

Ø1	Ø2	COD.	H
80	100	EIKFELRCI100080	165
100	120	EIKFELRCI120100	165

EIKFELTA1SASC



Elemento copritubo antiscottatura regolabile.

Anti-scald adjustable cover pipe.

COD.
EIKFELTA1SASC

MONOPARETE PER PELLET - SINGLE WALL FOR PELLET

EIKFELSPRAY



Bomboletta spray per sistema EdilPELLET 1,2 mm.
Spray paint for EdilPELLET 1.2 mm system.

EIKLUBGN



Lubrificante per guarnizione.
Lubricant for seal.

EIKFELKIT080



EdilKit Pellet 1,2 Ø 80 mm.

EdilKit Pellet 1.2 Ø 80 mm.

Contiene / Contains

1	Tubo da 1 m <i>Pipe 1 m</i>
1	Tubo da 0,50 m <i>Pipe 0.50 m</i>
1	Raccordo a "T" 90° con tappo <i>90° tee with tee cap</i>
1	Curva a 90° <i>Elbow 90°</i>
1	Collare con tassello <i>Wall bracket with anchor bolt</i>
1	Rosone con bombatura <i>Ceiling hole cover with camber</i>

COD.
EIKFELSPRAY

COD.
EIKLUBGN

Ø	COD.
80	EIKFELKIT080

Finitura bianca e grigia a richiesta
White and gray finish on request



EIKESPOSITORE2

Box Pellet 1.2 mm Ø 80 mm.

Pellet 1.2 mm box Ø 80 mm.

COD.

EIKESPOSITORE2

Contiene / Contains

6	Tubi 2 m <i>Pipes 2 m</i>
12	Tubi 1 m <i>Pipes 1 m</i>
6	Tubi 0,50 m <i>Pipes 0.50 m</i>
6	Tubi 0,25 m <i>Pipes 0.25 m</i>
12	Curve a 90° <i>90° elbows</i>
6	Curve a 90° con ispezione <i>90° elbows with inspection door</i>
12	Curve a 45° <i>45° elbows</i>
12	T a 90° con tappo <i>90° tees with tee cap</i>
6	T a 90° con ispezione <i>90° tees with inspection door</i>
24	Collari a muro <i>Wall brackets</i>
12	Rosoni copriforo con bombatura <i>Ceiling hole covers with camber</i>